

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A


Zeichnung  
Drawing

B

C

D

E

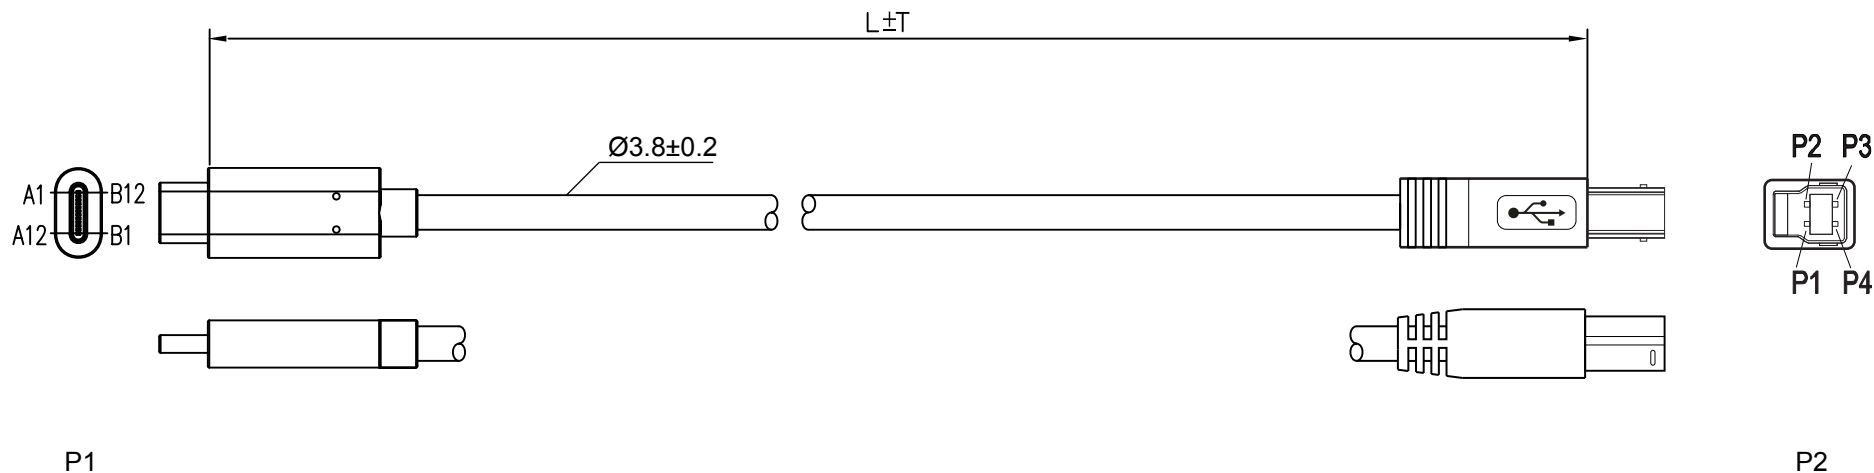

F

G

H



Schaltplan  
Wiring diagram

n.v.

USB 2.0 HighSpeed Kabel > USB-C™

Anschlüsse: USB 2.0 B-Stecker, USB 3.1 C Stecker  
 Materialien:  
 Isolierung: PVC  
 Kontakte: vergoldet  
 Stecker: vernickelt  
 Innenleiter: verzinnertes Kupfer  
 Datenrate: max. 0,48 Gbit/s  
 USB-Standard: 2.0

Konformität: RoHS

USB 2.0 HighSpeed cable > USB-C™

Connectors: USB 3.1 C plug, USB 2.0 B plug  
 Materials:  
 Insulation: PVC  
 Contacts: gold-plated  
 Plugs: nickel-plated  
 Inner conductor: TC  
 Data rate: max. 0.48 Gbit/s  
 USB standard: 2.0

Conformity: RoHS

Nr./No.	Länge/Length (m)	Farbe/Color
67985	1.00±0.20	
67191	1.00±0.20	

Änderungen

Datum	Name	gez.:	Datum	Name
		gez.:	03.02.2016	tf
		gepr.:	03.02.2016	tf
		Norm:		
Änderungen vorbehalten / Subject to change				

Bezeichnung

USB 3.1 C/B 2.0

Zeichnungs-Nr.:



Blatt

von

J

1 2 3 4 5 6 7 8 9 10 11 12 13 14